

SNAP MOUNT TYPE ALUMINUM ELECTROLYTIC CAPACITORS

YL Series

Useful of 10,000 hours at 105°C (Warranty of 7,000 hours at 105°C)

- Conform RoHS

Features

- The YL type is the miniaturization products of 7000 hours.



Product Specifications

Items	Specifications
Temperature range	-25°C ~ +105°C
Rated voltage	400 ~ 450V.DC
Capacitance tolerance	±20% (20°C, 120Hz)
Leakage current	0.02CV (µA) or 3mA, whichever is smaller or less (20°C, after 5 minutes) [C = nominal capacitance (µF), V = rated voltage (V)]
Dissipation factor	Less than the value specified in the standard products table. (20°C, 120Hz)
Permissible ripple current	As specified in the standard products table. (105°C, 120Hz)
Endurance	After 105°C, 7000 h, rated voltage with specified ripple current application Capacitance change : Within ±20% of initial value Dissipation factor : Not more than 200% of initial value specified Leakage current : Not more than initial value specified
Others	JIS C 5101-4.

Ripple current correction coefficient


Temperature (°C)	60	70	85	105	
Correction coefficient	1.9	1.7	1.4	1.0	
Frequency (Hz)	50/60	120	300	1K	≥10K
Correction coefficient	0.7	1.0	1.1	1.3	1.4

A continuous load should be avoided over 10 Arms at the terminal in accordance with the permissible current.

Please consult us when the ripple voltage exceeds 70Vp-p.

Product code : (Example) YL Series 400V 82µF ±20%

YL 2G 820 M C X S2 WP EC

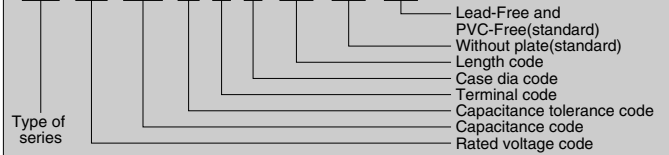

Refer to page 66-67 for other terminal shape available on request.

Standard Products Table

Rated Voltage (V. DC)	Capacitance (µF)	Case size øDXL(mm)	tanδ 20°C, 120Hz	Ripple current (Arms) 105°C, 120Hz	ESR(typ.) 20°C, 100Hz (mΩ)	Product name
400	82	22×25	0.20	0.59	1170	YL2G820MCXS2WPEC
		22×30	0.20	0.76	800	YL2G121MCXS3WPEC
	120	25×25	0.20	0.75	800	YL2G121MCYS2WPEC
		22×35	0.20	0.89	640	YL2G151MCXS4WPEC
	150	25×30	0.20	0.88	640	YL2G151MCYS3WPEC
		22×40	0.20	1.01	540	YL2G181MCXS5WPEC
	180	25×35	0.20	1.01	540	YL2G181MCYS4WPEC
		30×25	0.20	0.96	540	YL2G181MCZS2WPEC
		22×50	0.20	1.20	440	YL2G221MCXS7WPEC
	220	25×40	0.20	1.17	440	YL2G221MCYS5WPEC
		30×30	0.20	1.12	440	YL2G221MCZS3WPEC
		35×25	0.20	1.10	440	YL2G221MCAS2WPEC
		25×45	0.20	1.34	360	YL2G271MCYS6WPEC
	270	30×35	0.20	1.30	360	YL2G271MCZS4WPEC
		25×50	0.20	1.53	290	YL2G331MCYS7WPEC
	330	35×30	0.20	1.42	290	YL2G331MCAS3WPEC
		30×40	0.20	1.63	250	YL2G391MCZS5WPEC
	390	35×35	0.20	1.61	250	YL2G391MCAS4WPEC
		30×50	0.20	1.91	210	YL2G471MCZS7WPEC
	470	35×40	0.20	1.84	210	YL2G471MCAS5WPEC
560		35×45	0.20	2.08	180	YL2G561MCAS6WPEC
680	35×50	0.20	2.36	150	YL2G681MCAS7WPEC	

Rated Voltage (V. DC)	Capacitance (µF)	Case size øDXL(mm)	tanδ 20°C, 120Hz	Ripple current (Arms) 105°C, 120Hz	ESR(typ.) 20°C, 100Hz (mΩ)	Product name
420	100	22×30	0.20	0.69	1020	YL420V101MCXS3WPEC
		25×25	0.20	0.68	1020	YL420V101MCYS2WPEC
	120	22×35	0.20	0.79	850	YL420V121MCXS4WPEC
		25×30	0.20	0.79	850	YL420V121MCYS3WPEC
	150	22×40	0.20	0.93	680	YL420V151MCXS5WPEC
		25×35	0.20	0.93	680	YL420V151MCYS4WPEC
		30×25	0.20	0.88	680	YL420V151MCZS2WPEC
	180	22×50	0.20	1.09	570	YL420V181MCXS7WPEC
		25×40	0.20	1.06	570	YL420V181MCYS5WPEC
		30×30	0.20	1.02	570	YL420V181MCZS3WPEC
		35×25	0.20	1.00	570	YL420V181MCAS2WPEC
	220	25×45	0.20	1.21	470	YL420V221MCYS6WPEC
		30×35	0.20	1.18	470	YL420V221MCZS4WPEC
	270	25×50	0.20	1.38	380	YL420V271MCYS7WPEC
		30×40	0.20	1.35	380	YL420V271MCZS5WPEC
		35×30	0.20	1.28	380	YL420V271MCAS3WPEC
	330	30×45	0.20	1.55	310	YL420V331MCZS6WPEC
		35×35	0.20	1.48	310	YL420V331MCAS4WPEC
	390	30×50	0.20	1.74	270	YL420V391MCZS7WPEC
		35×40	0.20	1.67	270	YL420V391MCAS5WPEC
470	35×45	0.20	1.90	220	YL420V471MCAS6WPEC	

SNAP MOUNT TYPE ALUMINUM ELECTROLYTIC CAPACITORS

ALUMINUM ELECTROLYTIC CAPACITORS

Rated Voltage (V. DC)	Capacitance (μF)	Case size øDXL (mm)	tanδ 20°C, 120Hz	Ripple current (Arms) 105°C, 120Hz	ESR(typ.) 20°C, 100Hz (mΩ)	Product name
450	82	22×30	0.20	0.63	1250	YL2W820MCXS3WPEC
	100	25×25	0.20	0.68	1020	YL2W101MCYS2WPEC
	120	22×35	0.20	0.79	850	YL2W121MCXS4WPEC
		25×30	0.20	0.79	850	YL2W121MCYS3WPEC
	150	22×45	0.20	0.96	680	YL2W151MCXS6WPEC
		25×35	0.20	0.93	680	YL2W151MCYS4WPEC
		30×25	0.20	0.88	680	YL2W151MCZS2WPEC
	180	22×50	0.20	1.09	570	YL2W181MCXS7WPEC
		25×40	0.20	1.06	570	YL2W181MCYS5WPEC
		30×30	0.20	1.02	570	YL2W181MCZS3WPEC
		35×25	0.20	1.00	570	YL2W181MCAS2WPEC
	220	25×45	0.20	1.21	470	YL2W221MCYS6WPEC
		30×35	0.20	1.18	470	YL2W221MCZS4WPEC
		35×30	0.20	1.16	470	YL2W221MCAS3WPEC
	270	30×40	0.20	1.35	380	YL2W271MCZS5WPEC
		35×35	0.20	1.34	380	YL2W271MCAS4WPEC
	330	30×45	0.20	1.55	310	YL2W331MCZS6WPEC
	390	30×50	0.20	1.74	270	YL2W391MCZS7WPEC
35×40		0.20	1.67	270	YL2W391MCAS5WPEC	
470	35×50	0.20	1.96	220	YL2W471MCAS7WPEC	

Life time graph

Useful life depending on ambient temperature T_a and ripple current operating conditions I_r versus rated ripple current at 105°C, 120Hz.

